

IRON-50 12/24 VDC

Self-suction pump for diesel transfer

50
l/min

12/24
VDC

0.30
kW

- ✓ Eccentric with self-adjusting blades
- ✓ With recirculation bypass
- ✓ Rust treatment



IRON-50 12/24 VDC

Self-suction pump for diesel transfer

IRON-50 12 VDC	00001-CF00000
IRON-50 24 VDC	00011-CF00000
IRON-50 12 VDC · VITON · B100	00001-CF00100
IRON-50 24 VDC · VITON · B100	00011-CF00100

50
l/min

12/24
VDC

0.30
kW



Features

- › Self-suction - self-priming
- › Eccentric of self-adjusting blades
- › Rust treatment
- › Suitable for the diesel transfer (ask for other liquids)
- › Agricultural, building, public work and industries uses


Components

- › Recirculation bypass
- › Self-ventilated dust-protected motor
- › ON/OFF switch
- › Stainless steel filter of 350 µm (micron)
- › 2 m cable with clamps
- › Cast-iron pump body

Technical data

Free flow	50 l/min
Motor	0.30 kW
Consumption	12 VDC: 18-24 A
	24 VDC: 9-17 A
Operation	S2 60'
Motor speed	3,000 rpm
Protection	IP-55
Pressure	1.2 bar
Max. suction length	2.7 m
Priming pipe suction	5 m
Ambient temperature	-20 °C / +50 °C
Connection	F1" BSP threads and flanges

Flow curves

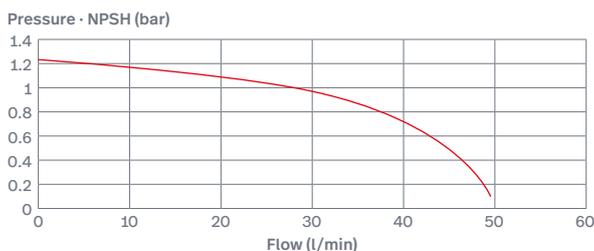

4.8 kg
(approx.)



200x160x140 mm
LxWxH (approx.)



5.2 kg
(approx.)



240x180x260 mm
LxWxH (approx.)

Optional

F1" aluminium flange kit	800003022
--------------------------	-----------

Supply kit

Pump with volume meter

- › Kit composed of pump with volume meter. Electronic or mechanical meters available.
- › It is possible to assemble the kit in a base.

**Please, ask for more information about our kits.*





 Product video
in our website

www.gespasa.es



Partida Horta d'Amunt s/n
25600 Balaguer (Lleida) · Spain

T +34 973 451 072
gespasa@gespasa.es



Ref. 20250616.V5

*Because of the constant innovations and development, TOT COMERCIAL SA reserves the right to modify their product specifications and publicity, without prior notification.

