


## GESPASA EA-88 (0.74 kW) 230 VAC

Self-suction gear pump for the lubricant transfer. They are suitable for its use in the agriculture, building, public works and industry.

### EA-88 (0.74 kW) 230 VAC

20-25 l/min

 LUBRICANT

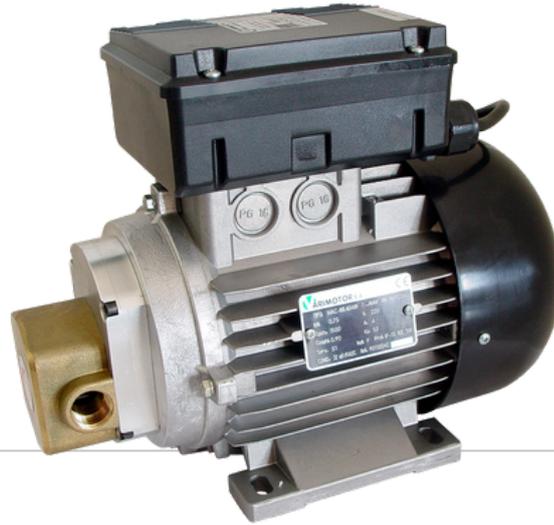

**EA-88 (0.74 kW) 230 VAC 20-25 l/min**

**03070**

- Self-suction gear pump for the lubricant transfer.
- They are suitable for its use in the agriculture, building, public works and industry.

#### Technical data:

- With recirculation bypass system
- It is suitable for lubricant of maximum viscosity 350 cSt
- Suction: 2.5 m · Delivery: 40 m
- Flow: 20-25 l/min (SAE-20/50 W at 25 °C)
- Motor: 0.74 kW self-ventilated 230 VAC 50/60 Hz single-phase
- IP-55 protection
- With thermal protector
- Consumption: 4-6 A
- 1,500 rpm
- Bypass pressure: 9-10 bar
- Inlet / outlet tube: 1/2" GAS (BSP)
- ON/OFF Switch
- 3 m 230 VAC connection cable with injected plug